

Surge suppressor, diode combination, 24 V DC, for motor contactors Size S0,



General technical data:

Product brand name		SIRIUS
Product designation		surge suppressor
Size of contactor		S0
Design of the surge suppressor		with diode assemblies
Ambient temperature		
• during storage	°C	-40 ... +80
• during operation	°C	-25 ... +60

Control circuit/ Control:

Type of voltage of the control supply voltage		DC
Control supply voltage 1		
• at DC		
— rated value	V	24






Installation/ mounting/ dimensions:

Mounting position		any
Mounting type		clip-on
Width	mm	30
Height	mm	19

Depth	mm	12
-------	----	----

Certificates/ approvals:


Certificate of suitability	CE / UL / CSA / CCC
----------------------------	---------------------

General Product Approval	EMC	Declaration of Conformity	Miscellaneous
 CSA	 UR	 EAC	 RCM
		 EG-Konf.	

Test Certificates	Shipping Approval
-------------------	-------------------



Special Test Certificate	Type Test Certificates/Test Report	 BUREAU VERITAS	 PRS	 RINA	 RMRS
--	--	---	--	---	---


other	Railway
-------	---------

Confirmation	 VDE	Vibration and Shock
------------------------------	--	-------------------------------------

Further information

- Information- and Downloadcenter (Catalogs, Brochures,...)**
<http://www.siemens.com/industrial-controls/catalogs>
- Industry Mall (Online ordering system)**
<http://www.siemens.com/industrymall>
- Cax online generator**
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RT2926-1ER00>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
<https://support.industry.siemens.com/cs/ww/en/ps/3RT2926-1ER00>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**
http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RT2926-1ER00&lang=en

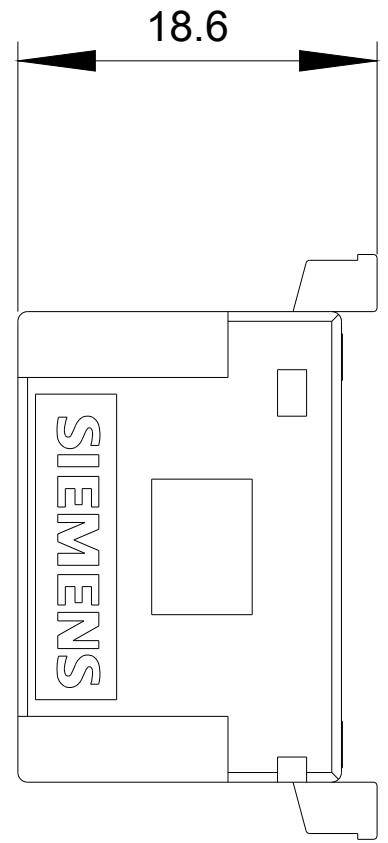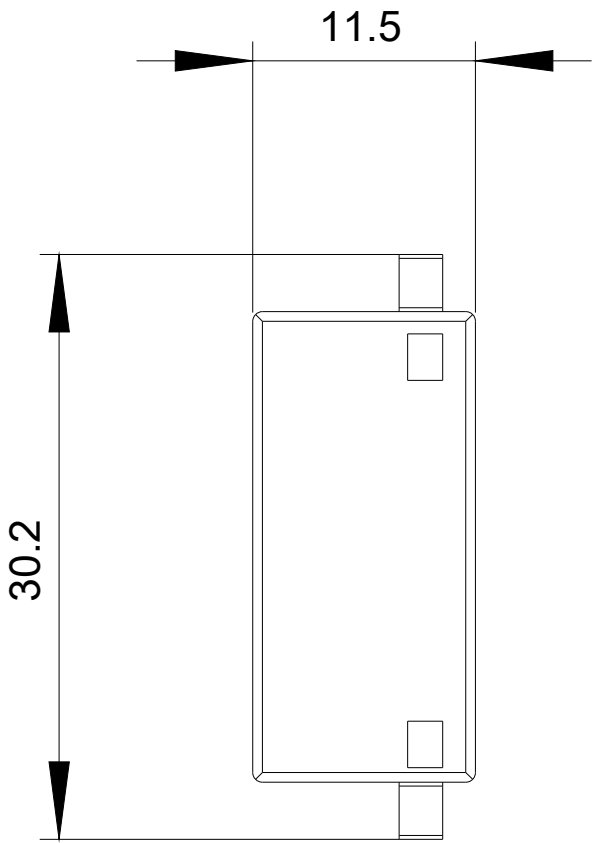

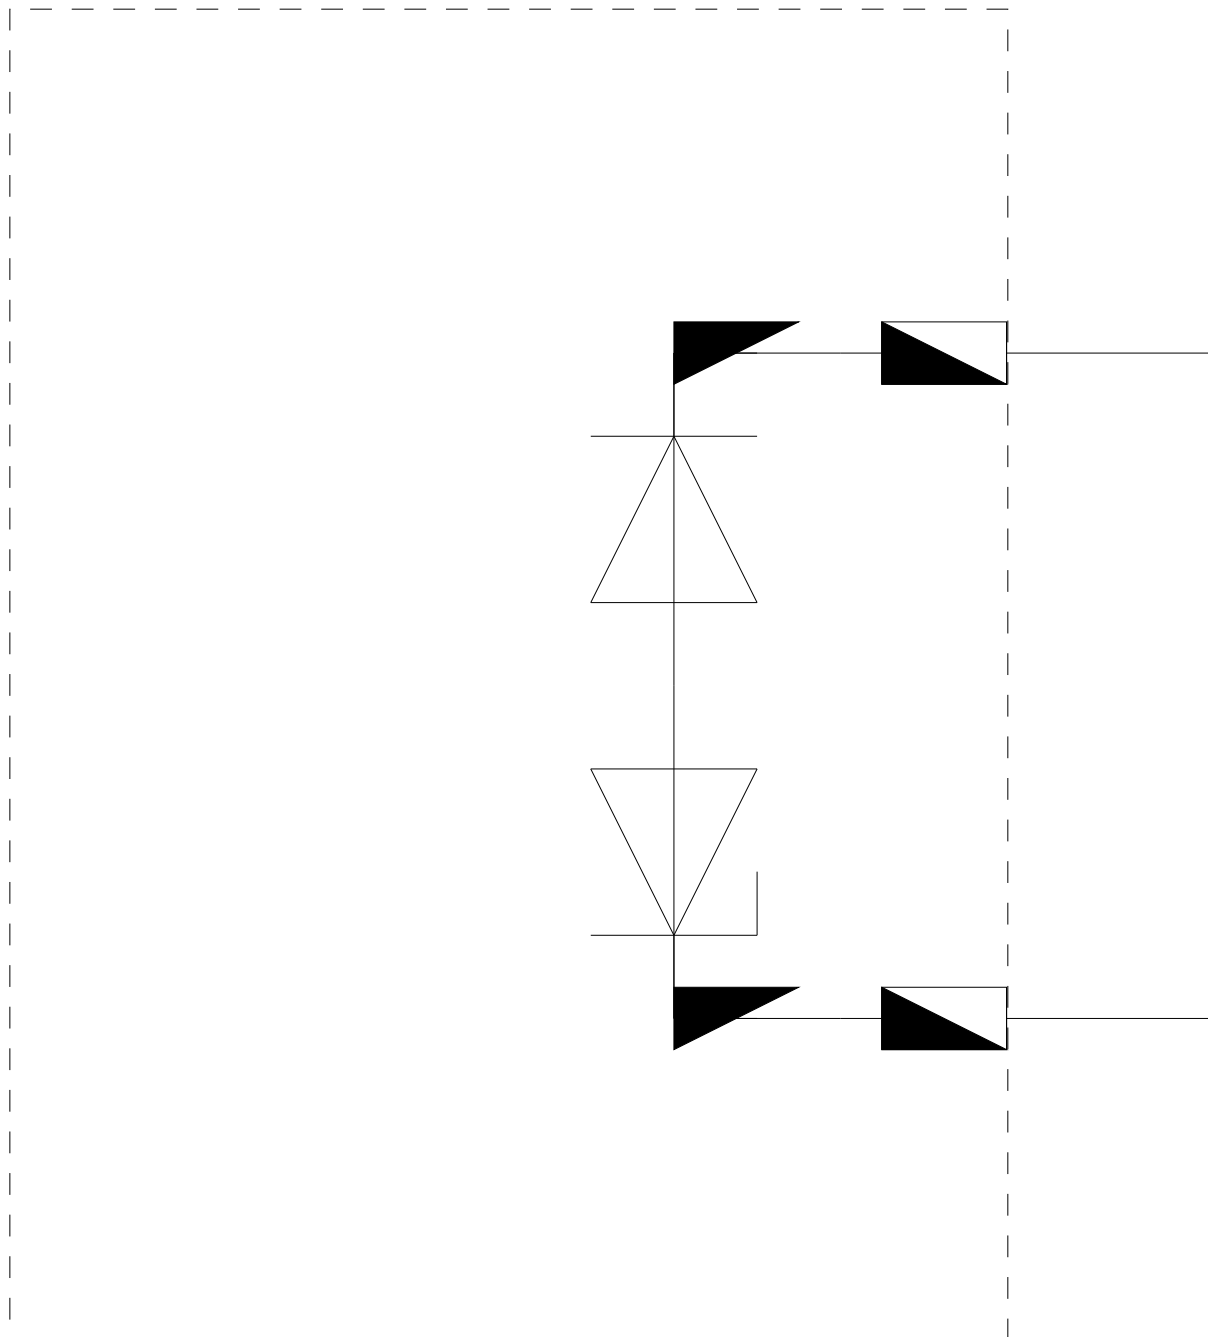

last modified:

01/08/2020