

Undervoltage release 24 V DC with screw terminal for circuit breaker 3RV2



General technical data	
Product brand name	SIRIUS
Product designation	undervoltage release
Size of the circuit-breaker	S00, S0, S2, S3
Suitability for use	motor circuit breaker
Protection class IP on the front	IP20
Design of short-circuit protection	fuse
Degree of pollution	3
Insulation voltage rated value	690 V
Insulation voltage with degree of pollution 3 rated value	690 V
Ambient temperature	
• during storage	-50 ... +80 °C
• during operation	-20 ... +60 °C
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	F
Reference code acc. to DIN EN 61346-2	F
Auxiliary circuit	

Number of NC contacts for auxiliary contacts instantaneous contact	0
Number of NO contacts for auxiliary contacts instantaneous contact	0
Number of NO contacts for auxiliary contacts leading contact	0
Number of CO contacts of auxiliary contacts instantaneous contact	0

Control circuit/ Control

Type of voltage of the control supply voltage	DC
Control supply voltage	
<ul style="list-style-type: none"> • 1 <ul style="list-style-type: none"> — at DC — rated value 	24 V

Installation/ mounting/ dimensions

Mounting type	snap-on mounting
Width	18.5 mm
Height	90 mm
Depth	68 mm

Certificates/approvals

Certificate of suitability	CE / UL / CSA
----------------------------	---------------

General Product Approval	Declaration of Conformity	Test Certificates
--------------------------	---------------------------	-------------------



[Miscellaneous](#)

[Special Test Certificate](#)

Test Certificates	Shipping Approval
-------------------	-------------------

[Type Test Certificates/Test Report](#)



Shipping Approval	other	Railway
-------------------	-------	---------



[Confirmation](#)



[Vibration and Shock](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3RV2902-1AB4>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RV2902-1AB4>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2902-1AB4>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RV2902-1AB4&lang=en

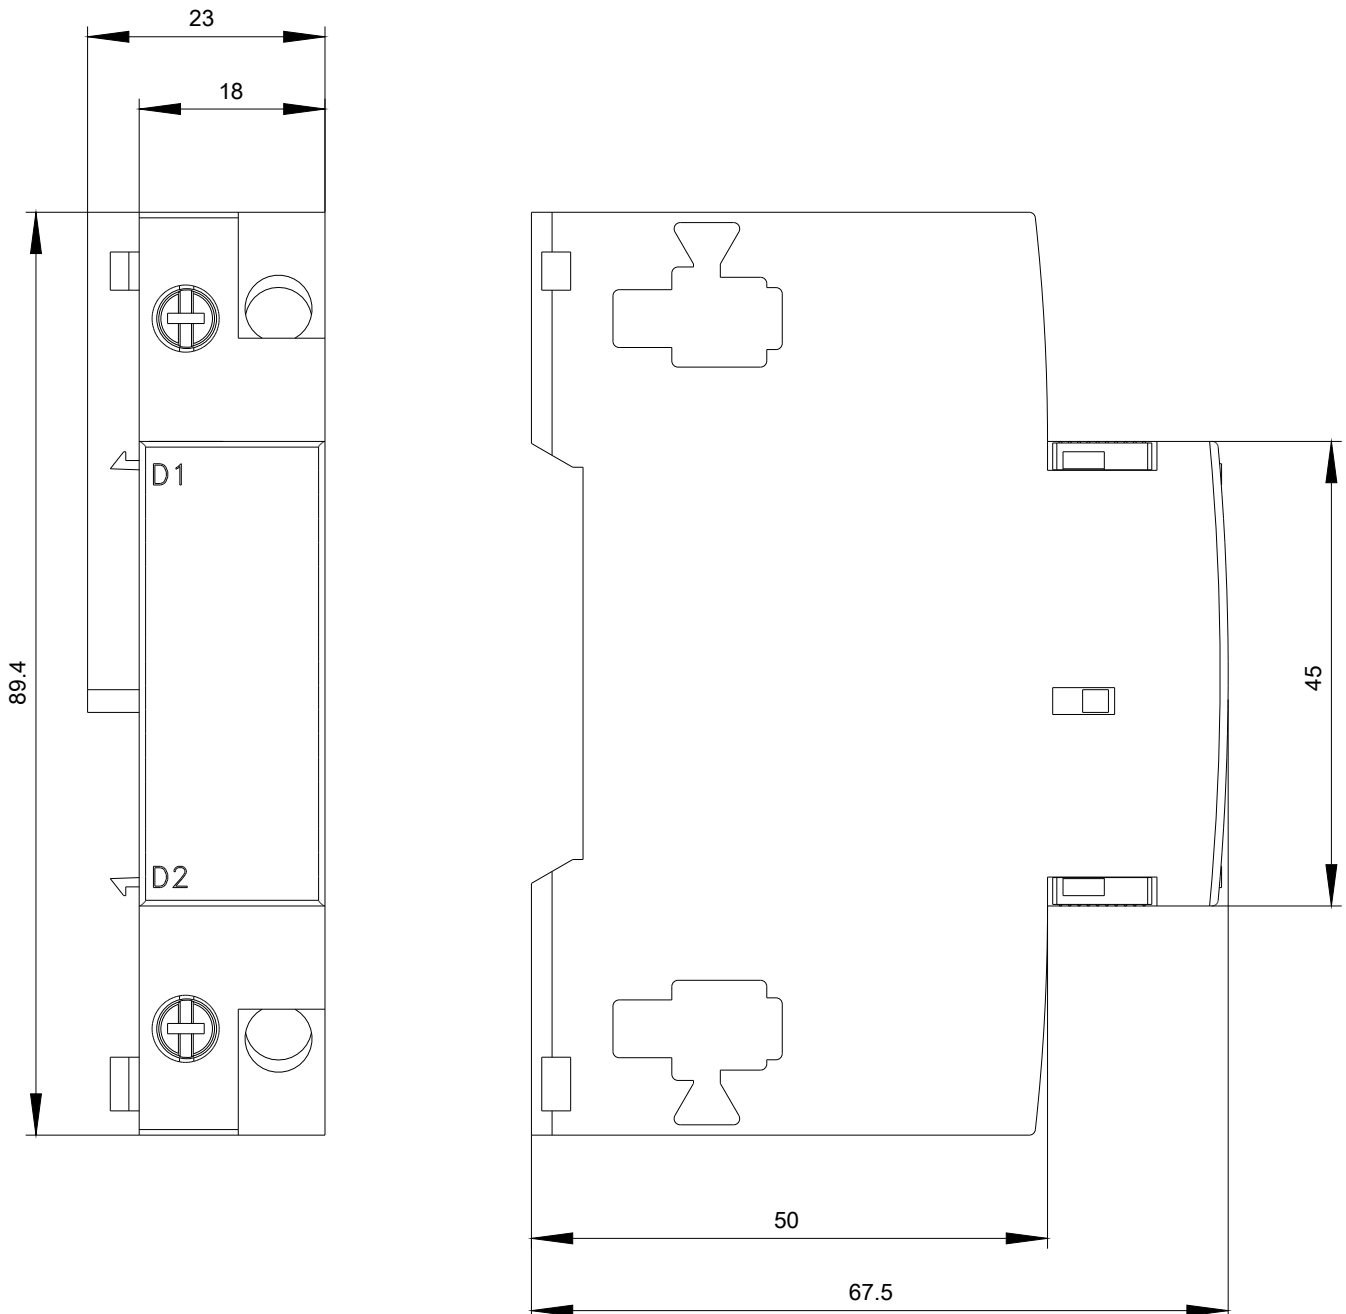

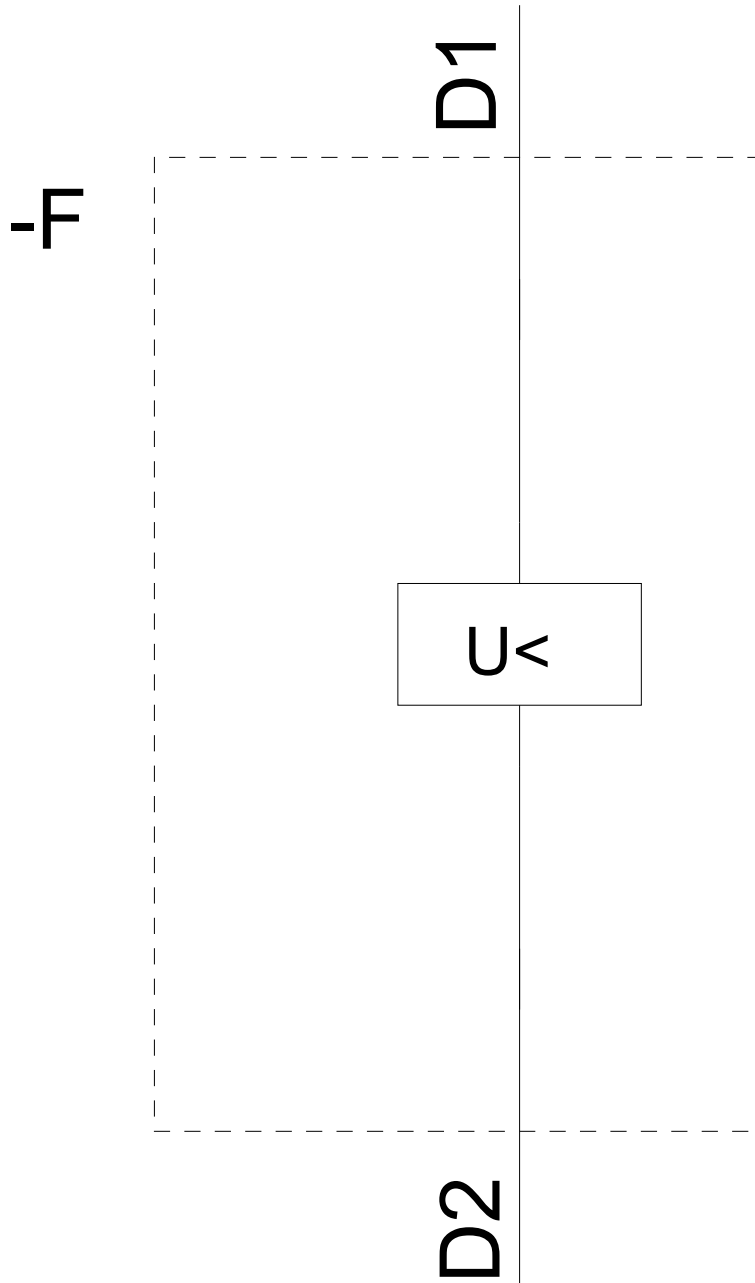

last modified:

01/08/2020