

ACTUATOR-/INDICATOR COMPONENT LAMP HOLDER BA 9S  
 WITHOUT LAMP SCREW TERMINAL RATED VOLTAGE ACC.TO  
 LAMP !!! Phased-out product !!! SIRIUS ACT 3SU1 is successor



<b>Product designation</b>	lampholder
<b>Contact block/ lampholder</b>	
<b>Mounting type</b>	BA 9s
<b>Number of lampholders</b>	1
<b>General technical data</b>	
<b>Product function</b>	
• positive opening	No
<b>Product component</b>	
• diode	No
• lamp transformer	No
• Light source	No
• series resistor	No
<b>Insulation voltage</b>	
• rated value	250 V
<b>Degree of pollution</b>	class 3
<b>Type of voltage</b>	
• of the operating voltage	AC/DC
<b>Surge voltage resistance rated value</b>	4 kV

<b>Protection class IP</b>	
• of the enclosure	IP40
• of the terminal	IP20
• with screwed-in light source	IP00
<b>Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750</b>	H
<b>Reference code acc. to DIN EN 81346-2</b>	P
<b>Reference code acc. to DIN EN 61346-2</b>	P
<b>Operating voltage</b>	
• at AC	
— at 50 Hz rated value	6 ... 230 V
— at 60 Hz rated value	6 ... 230 V
• at DC	
— rated value	6 ... 230 V





<b>Auxiliary circuit</b>	
<b>Number of NC contacts for auxiliary contacts</b>	0
<b>Number of NO contacts for auxiliary contacts</b>	0
<b>Number of CO contacts</b>	
• for auxiliary contacts	0

<b>Connections/ Terminals</b>	
<b>Type of electrical connection</b>	screw-type terminals
<b>Type of connectable conductor cross-sections</b>	
• for auxiliary contacts	
— solid	2x (1.0 ... 1.5 mm <sup>2</sup> )
— solid with core end processing	2x (0.5 ... 0.75 mm <sup>2</sup> )
— finely stranded with core end processing	2x (0.5 ... 1.5 mm <sup>2</sup> )
• at AWG conductors for auxiliary contacts	2x (18 ... 14)
<b>Tightening torque</b>	
• for auxiliary contacts with screw-type terminals	0.8 N·m

<b>Ambient conditions</b>	
<b>Ambient temperature</b>	
• during operation	-25 ... +60 °C
• during storage	-25 ... +80 °C

<b>Installation/ mounting/ dimensions</b>	
<b>Mounting type</b>	front mounting
<b>Height</b>	36.5 mm
<b>Width</b>	10 mm
<b>Depth</b>	20 mm

<b>Certificates/ approvals</b>	
--------------------------------	--

General Product Approval		Declaration of Conformity		other	
				<a href="#">Miscellaneous</a>	<a href="#">Confirmation</a>
CCC	CSA		EG-Konf.		

#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

[www.siemens.com/ic10](http://www.siemens.com/ic10)

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3SB3400-1A>

**Cax online generator**



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3SB3400-1A>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3SB3400-1A>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3SB3400-1A&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3SB3400-1A&lang=en)

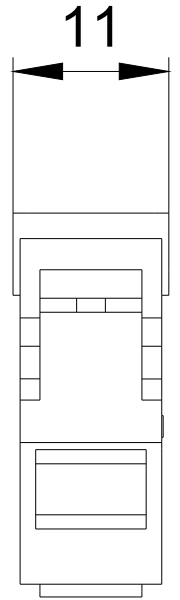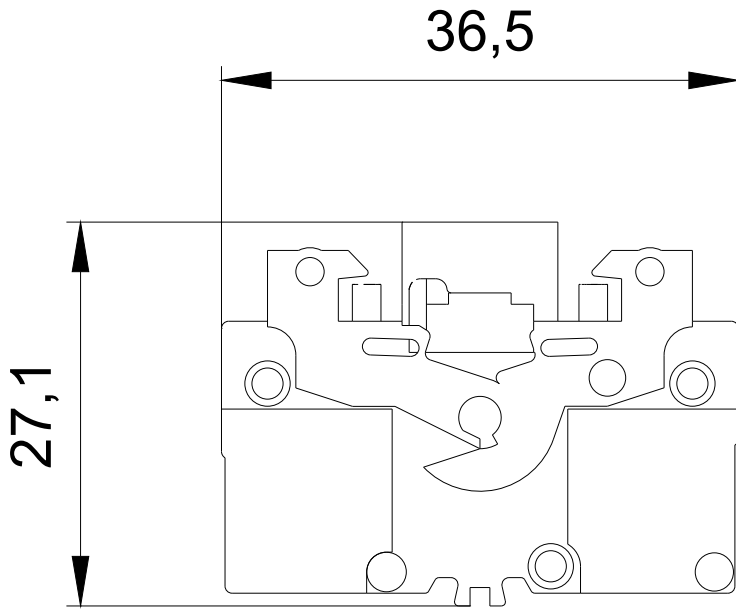

last modified:

12/18/2019