

ACTUATOR-/INDICATOR COMPONENT W. SEPARATE LAMP
 TEST FUNCTION LAMP HOLDER BA 9S WITHOUT LAMP, FOR
 LAMP MAX.2.6W SCREW TERMINAL RATED VOLTAGE ACC.TO
 LAMP SUITABLE F LED 24/48/230V AC/DC !!! Phased-out product
 !!! SIRIUS ACT 3SU1 is successor Preferred successor type is
 >>3SU1400-1CK10-1AA0 + 3SU1401-1BH60-1AA0<<

Figure similar

Product designation	lampholder
Contact block/ lampholder	
Mounting type	BA 9s
Number of lampholders	1
General technical data	
Product function	
• positive opening	No
Product component	
• diode	No
• lamp transformer	No
• Light source	No
• series resistor	Yes
Insulation voltage	
• rated value	250 V
Degree of pollution	class 3
Type of voltage	
• of the operating voltage	AC/DC

Surge voltage resistance rated value	4 kV
Protection class IP	
• of the enclosure	IP40
• of the terminal	IP20
• with screwed-in light source	IP00
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	H
Reference code acc. to DIN EN 81346-2	P
Reference code acc. to DIN EN 61346-2	P
Operating voltage	
• at AC	
— at 50 Hz rated value	6 ... 230 V
— at 60 Hz rated value	6 ... 230 V
• at DC	
— rated value	6 ... 230 V

Auxiliary circuit

Number of NC contacts for auxiliary contacts	0
Number of NO contacts for auxiliary contacts	0
Number of CO contacts	
• for auxiliary contacts	0

Connections/ Terminals

Type of electrical connection	screw-type terminals
Type of connectable conductor cross-sections	
• for auxiliary contacts	
— solid	2x (1.0 ... 1.5 mm ²)
— solid with core end processing	2x (0.5 ... 0.75 mm ²)
— finely stranded with core end processing	2x (0.5 ... 1.5 mm ²)
• at AWG conductors for auxiliary contacts	2x (18 ... 14)
Tightening torque	
• for auxiliary contacts with screw-type terminals	0.8 N·m

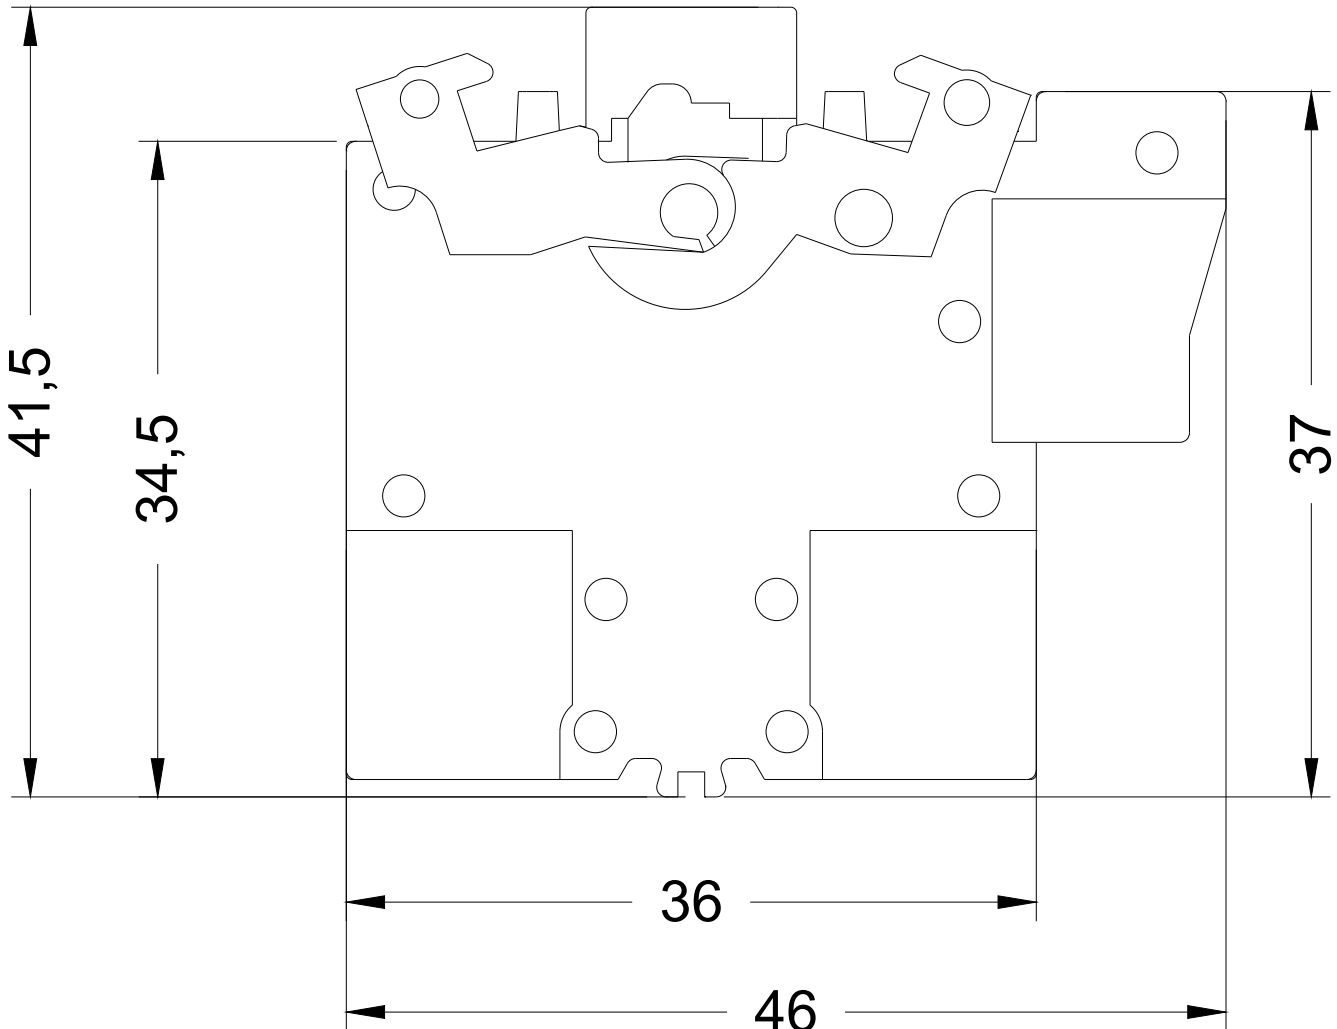
Ambient conditions

Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-25 ... +80 °C

Installation/ mounting/ dimensions

Mounting type	front mounting
Height	45.9 mm
Width	10 mm
Depth	36.8 mm

Certificates/ approvals

[Miscellaneous](#)[Confirmation](#)**Further information****Information- and Downloadcenter (Catalogs, Brochures,...)**www.siemens.com/ic10**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3400-1G>**Cax online generator**<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3400-1G>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3SB3400-1G>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB3400-1G&lang=en

last modified:

12/18/2019