

APPA 30 Series

The State-of-the-Art Clamp-On Measuring Instruments



APPA®

Advanced Instrument Technology Made Easy



APPA 31

- AC 400A capability
- 1.9% basic accuracy
- Non-intrusive transducing
- Up to 29mm diameter conductor
- 5 feet drop proof
- Coiled cable output plugs
- Ergonomically designed jaw and trigger
- Hand guard designed
- Carrying case included
- IEC 1010-1 CAT II 600V



APPA 32

- AC/DC 600A capability
- Dual Hall sensor
- 2.0% basic DCA/ACA accuracy
- Non-intrusive transducing
- Up to 34mm dia conductor
- Up to 20x40mm busbar
- DCA zero adjust knob
- Power on indicating
- Battery low indicator
- 5 feet drop proof
- Coiled cable output plugs
- Hand Guard protection
- Carrying case included
- IEC 1010-1 CAT II 600V




APPA 30T

- AC/DC 300A capability
- Auto zero key for DCA
- Red LED-Low battery indication
- GreenLED-Power on indication
- Coiled cable output leads
- Insulated input jacks
- Standard 9V battery
- Up to 22mm dia. conductor
- 4 feet drop proof
- Deluxe carrying case
- Hand guard designed
- IEC 1010-1 CAT. III 600V Safety Standard



APPA 39T

- AC/DC 1000A capability
- Auto zero key for DCA
- Red LED-Low battery indication
- GreenLED-Power on indication
- Coiled cable output leads
- Insulated input jacks
- Standard 9V battery
- Up to 51mm dia. (2") conductor
- Up to 24x60mm busbar
- 4 feet drop proof
- Deluxe carrying case
- Hand guard designed
- IEC 1010-1 CAT. III 1000V Safety Standard

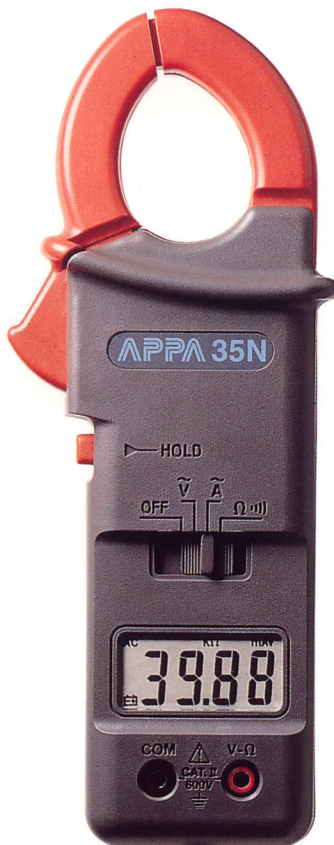

APPA 35N
APPA 35R (True-RMS reading)

4000 count high resolution
 AC 400A, 600V Capability
 Autoranging
 1.2% basic ACV accuracy
 1.9% basic ACA accuracy
 1.9% basic OHM accuracy
 Continuity buzzer
 Up to 29mm (600MCM) conductor
 600V circuit protection
 Display hold function
 Auto power off
 4 feet drop proof
 Insulated input jacks
 Hand guard protection
 Deluxe carrying case
 IEC 1010-1 CAT II 600V



APPA 33II
APPA 33RII(True-RMS reading)

2000 count large scale LCD display
 AC 600 Amps capability
 AC 600 Volts capability
 2000 Ohms Resistance range
 True RMS ACV/ACA (APPA33RII)
 Continuity Beeper
 Display Hold
 600 Volts circuit protection
 Insulated input jacks
 Up to 34mm dia. (750MCM) conductor
 4 feet drop proof
 Protective carrying case
 Hand guard designed
 CAT. III 600V/CAT. II 1000V Safety Standard



APPA39AR(True-RMS reading)
APPA 39 AC

4000 count high resolution
 AC 1200A in specification
 AC 1000A in specification (39AR)
 1500A overload protection
 AC 600A, DC 1000V capability
 Autoranging
 1.2% basic ACV accuracy
 1.2% basic DCV accuracy
 2% basic OHM accuracy
 CONTINUITY beeper
True RMS reading in ACV/ACA
 Up to 51mm dia. (2") conductor
 600V circuit protection
 Display HOLD function
 Auto Power Off
 Insulated input jacks
 Hand guard designed
 Deluxe carrying case
 IEC 1010-1 CAT. II 1000V



APPA 33
APPA 33R (True-RMS reading)

4000 count high resolution
 AC 600A, 600V Capability
 Autoranging
 1.2% basic ACV accuracy
 1.9% basic ACA accuracy
 1.9% basic OHM accuracy
 Continuity beeper
 Up to 40mm dia. (750MCM) conductor
 600 Volts circuit protection
 Display hold function
 Auto power off
 4 feet drop proof
 Insulated input jacks
 Hand guard designed
 Deluxe carrying case
 IEC 1010-1 CAT II 600V



APPA 30
APPA 30R (True-RMS reading)

4000 count digital resolution
Autoranging
Dual Hall sensor
Nickel-Steel alloy jaw mechanism
AC/DC 300 Amps capability
AC/DC 600 Volts capability
0.5% basic DCV accuracy
1.5% basic ACV accuracy
1.0% basic DCA/ACA accuracy
0.9% basic OHM accuracy
Continuity Beeper
10mA resolution
Auto-Zeroing key for DCA
Data hold function
MAX hold function
Auto Power off selectable
600V protection in every range
Up to 22mm dia (350 MCM) conductor
4 feet drop proof
Insulated input jacks
Hand guard designed
Deluxe carrying case
IEC 1010-1 CAT II 600V



APPA 36II
APPA 36R II (True-RMS reading)

4000 count large scale LCD display
Autoranging
Dual Hall Sensor
AC/DC 600 Amps capability
AC/DC 600 Volts capability
40M Ohms Resistance range
True RMS ACV/ACA (APPA36R II)
Continuity Beeper
Display Hold
Maximum Hold
Auto-Zeroing Key for DCA
Auto Power off selectable
600Volts Circuit protection
Insulated input jacks
Up to 35mm dia. (750MCM) conductor
Up to 40x15mm busbar
4 feet drop proof
Deluxe carrying case
Hand guard designed
CAT. III 600V Safety Standard



APPA 39MR (True-RMS reading)

4000 count high resolution
AC/DC 1000A in specification,
and 2000A overload protection
AC 600V, DC 1000V capability
Autoranging
Dual Hall sensor
Nickel-Steel alloy jaw mechanism
0.7% basic DCV accuracy
1.2% basic ACV accuracy
1.0% basic DCA/ACA accuracy
1.5% basic ACA accuracy
1.0% basic OHM accuracy
0.5% basic Hz accuracy
CONTINUITY beeper
True RMS reading in ACV/ACA
Frequency measurement through
input jack or clamp-on
PEAK HOLD function
Auto-Zero key for DCA
Auto Power Off
Up to 51mm dia. (2") conductor
Up to 24 x 60mm busbar
4 feet drop proof
Insulated input jacks
Hand guard designed
Deluxe carrying case
IEC 1010-1 CAT. II 1000V



APPA 39
APPA 39R (True-RMS reading)

4000 count high resolution
AC/DC 1000A in specification,
and 2000A overload protection
Autoranging
Dual Hall sensor
1.9% basic DCA/ACA accuracy
0.5% basic Hz accuracy
Frequency measurement by
clamp-on
Peak hold function
Auto zero key for DCA
Auto power off
Up to 51mm dia. (2") conductor
Up to 24x60mm busbar
4 feet drop proof
Hand guard designed
Deluxe carrying case
IEC 1010-1 CAT. II 1000V