


Parameters PA151 Digital Multimeter with a Non-Contact Voltage Indicator

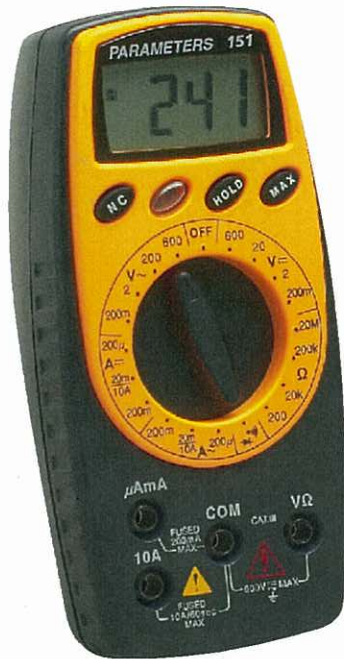

- **Non-contact voltage indicator**
Low-tension lines from 70 to 440V AC 50-0Hz
- **MAX hold**
- **Data hold**
- **Safety input jacks**
- **Continuity test**
- **Diode test**
- **10A fused**
- **Safety test leads**
- **Overload protection on all ranges**

Measurement Ranges:

3.5 digit, 1999 counts digital display

DC volts

0-200mV/2V/20V/600V $\pm 1.2\%$

AC volts

0-200mV/2V/200V/600V/50-500Hz $\pm 2.0\%$

DC current

0-200uA/20mA/200mA/10A $\pm 1.5\%$

AC current

0-200uA/20mA/200mA/10A/50-500Hz $\pm 2.0\%$

Resistance

0-200Ω/20K/200K/20MΩ $\pm 1.5\%$

Resolution

100uV. 0.1uA 0.1Ω

Safety:

Designed to meet IEC 1010-1 CATIII 600V, class 2 & pollution deg. 2 indoor use comply with CE.



Power Parameters Pty. Ltd.
83 Northern Road
Heidelberg West 3081
Victoria Australia

Phn 1 800 623 350
Fax 1 800 067 263
Email: power@parameters.com.au
www.parameters.com.au